



THE REASON

- General-purpose metal threading assembly of medium strength
- Prevents Bolts, Nuts and Screws from loosening
- Protects against corrosion and is tolerant to Oil during curing

USES INCLUDE

- Flywheel bolts
- Sump plug
- Carburettor bolts
- Crankshaft nuts
- Timing cover bolts
- Timing chain guide bolts

INSTRUCTIONS

- Clean product before use. Apply a small amount of Thread Locker to threads. Tighten to recommended torque. Thread Locker will form a vibration proof seal within 8 minutes


CAUTION



Avoid contact with eyes, skin and clothing. Wear suitable gloves. Keep out of the reach of children. If swallowed seek medical attention immediately and show this bottle or label.

THREAD LOCKER

Up to M36 thread size
Temperature: -55 – 150 C
Breakaway torque: 18nm
Fixture time: 8 min

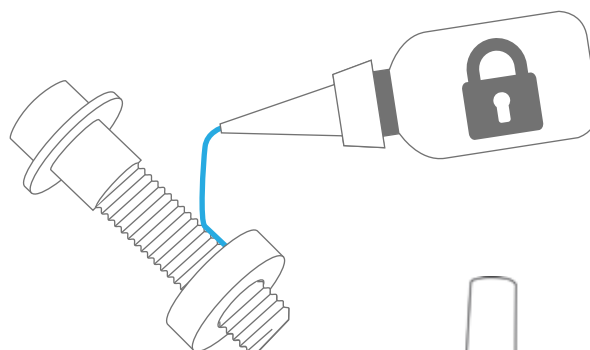

BLUE



*For illustrative purposes only. Actual bottle design may vary



USE THE CORRECT PPE FOR YOUR HANDS AND EYES WHEN USING AN AIRLINE.

IMPORTANT



IMPORTANT INFORMATION



BGA products are to be replaced by an experienced automotive installer. This information is to be used as reference only. Always seek manufacturer specification.

